



## Seat Mount Brackets For Honda Talon

Part # 15-6900

Honda Talon1000X & 1000R (2 seat models)

Fits with HighBack RT seats 15-0050, 15-0051, 15-0065

Congratulations on your purchase of the DragonFire Racing seat mount brackets for the Honda Talon 1000X and 1000R. With these seat mount brackets you will be able to improve your seating position while retaining the factory slide adjustment with aftermarket DragonFire Racing seats. Designed to be simple, clean and strong, this is the only way to go when replacing your Honda factory seats. Be sure to check out the full line of DragonFire Accessories for your Honda vehicle at your local authorized dealer or online at <http://www.DragonFireRacing.com>

**\*Note: Product fits two seat Honda Talon 1000X and 1000R models. This is the seat mount brackets only and does not include seats. One part number needed per two seats.**

### ! WARNING


- Confirm all parts are included in kit before starting installation
- Read and understand these instructions before installing product
- Do not use if there are signs of damage
- If roll over occurs inspect for damage and replace if needed
- Injury can result from rollover, use this product with caution

#### Tools Required

- 13mm ratcheting wrench
- 12mm ratcheting wrench
- 12mm socket
- socket wrench

#### Disclaimer

Off road activities can be hazardous and could lead to injury, dismemberment, paralysis and death. No warranty of representation is made as to the products ability to protect the user from any injury or death. The user assumes that risk. The acceptance and /or use of this merchandise purchased from DragonFire by the customer hereby shall release DragonFire from any and all liability pertaining to the use of such merchandise.

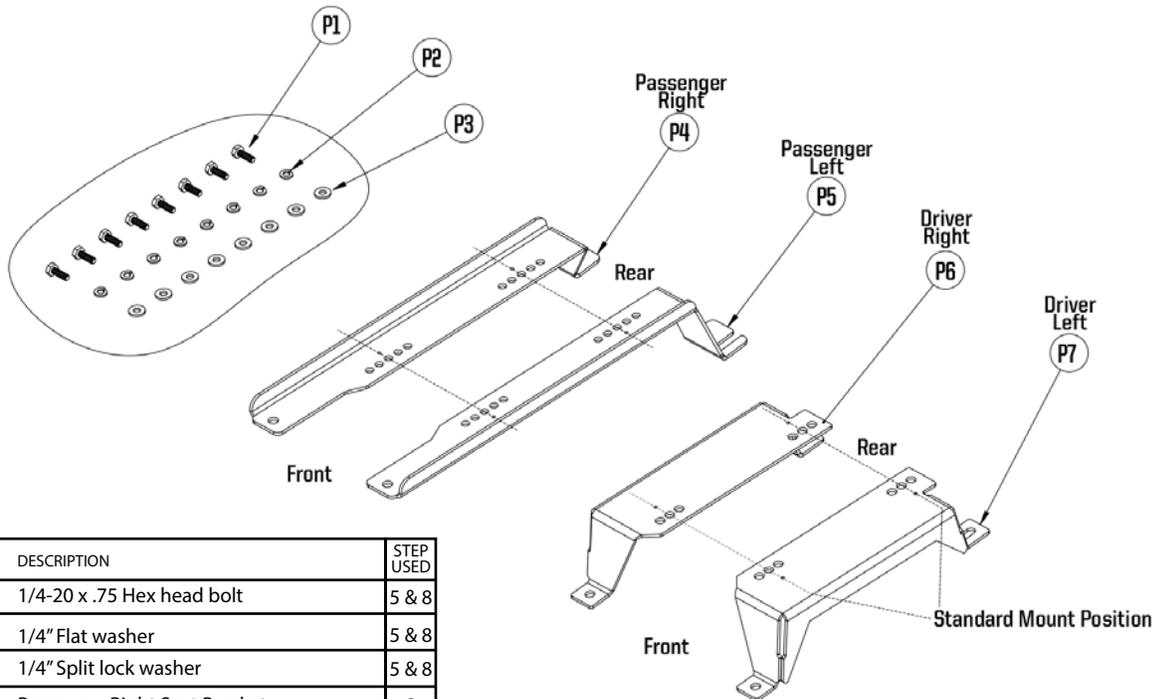

ITEM NO.	QTY	DESCRIPTION	STEP USED
P1	8	1/4-20 x .75 Hex head bolt	5 & 8
P2	8	1/4" Flat washer	5 & 8
P3	8	1/4" Split lock washer	5 & 8
P4	1	Passenger Right Seat Bracket	9
P5	1	Passenger Left Seat Bracket	9
P6	1	Driver Right Seat Bracket	3
P7	1	Driver Left Seat Bracket	3

Figure A

**Step 1:** Place vehicle on a flat and level surface and remove key.

**Step 2:** Remove factory driver seat. Bottom cushion removes first to expose 4x 13mm hex nuts holding seat to slider rails.

**Step 3:** Install your driver side brackets P6 and P7. You will need hardware 4x P1 , 4x P2, 4x P3.


**Step 4:** Start with the standard mounting position on brackets in **Figure A** and center mount holes on seat **Figure B**.

Note: Small holes indicate "stock" seating position.

Note: You may have to loosen the bolts to align with slide rails.


**Install order - bolt - lock washer - flat washer - bracket - seat**

**Step 5:** Check that brackets align with seat slider rails and tighten bolts.

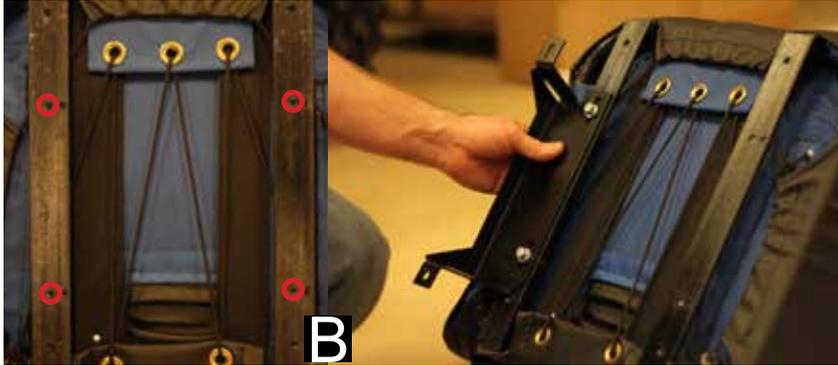

**Step 6:** You can now put your driver side seat in the car, tighten the 4 hex nuts. In order to reach the rear nuts you will have to reach under the seat with a socket wrench. **Figure-C**

**Step 7:** Remove factory passenger seat. Bottom cushion removes first to expose 2x 12mm hex nuts and 2x 12mm hex bolts holding seat to frame. After you remove seat, re-install nuts on rear studs just until stud is flush with top of nut.

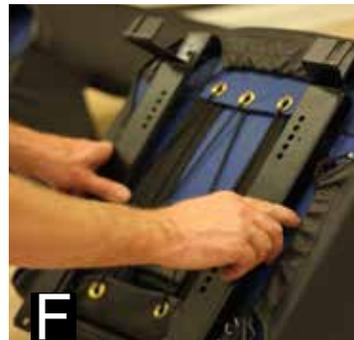

**Step 8:** Trim plastic on passenger side near rear outer stud for access to nut later. **Figure-D**

**Step 9:** Using P4 and P5 install the passenger seat brackets. Start with the standard mounting position on brackets in **Figure A** and center mount holes on seat **Figure B**. You will need hardware 4x P1 , 4x P2, 4x P3.

Note: Small holes indicate "stock" seating position. **Figure F**

**Install Order: bolt - lock washer - washer - seat bracket - seat**

**Step 10:** Next you will install the passenger seat. For easier install be sure to install the nuts flush with the rear studs (see Step 3). Slide rear tab slots onto studs under nuts. Thread bolts into front holes. Tighten front bolts. Check fitment.

**Step 11:** You can use your 12mm ratchet wrench to access the rear nuts from inside the rear wheel well. Reach through the cut up plastic piece on the passenger side to access nut. You will then need a 12mm socket wrench in order to tighten down the inside nut. **Figure-G**

**Step 12:** Enjoy your new seats!

**BUILT TO REIGN**